

BROAN QT236BCOwner's Manual


Shop genuine replacement parts for BROAN QT236BC



Find Your BROAN HVAC Parts - Select From 1309 Models

----- Manual continues below ------

QUIET HOOD™ CONVERTIBLE RANGE HOODS



Broan's Quiet Range Hood has a patented air chamber design that significantly reduces noise up to 40 percent over comparable, conventional hoods.

FEATURES

- Three (3) ducting options:
 - 31/4" x 10", horizontal or vertical discharge
 - 7" round, vertical discharge
 - Non-ducted, using BPQTF filter (sold separately)
- · Infinite, rotary speed control offers quiet fan operation
- · Rotary light control
- Two, 40W, Type A-15 appliance bulbs provide bright cooktop lighting (bulbs not included)
- Translucent, polymeric light lens easily removed for relamping
- · Convenient night-light
- Thermally-protected, plug-in motor
- Electronically-balanced, polymeric fan blade
- · Washable, aluminum mesh grease filter
- Optional non-ducted filter (BPQTF) for particulate and odor removal
- · Keyhole mounting slots for easy installation
- Available in 30", 36", or 42" widths
- Powder-coated, baked enamel finishes in White, Almond, Biscuit, and Black, as well as Stainless Steel construction
- UL Listed and CSA certified

SPECIFICATIONS

VOLTS	HZ.	AMPS	CFM	SONES	DUCT
120	60	1.7	170	4.5	3¼" x 10" (H)
120	60	1.7	200	4.5	3¼" x 10" (V)
120	60	1.7	220	4.5	7" Round (V)

MODEL NUMBERS

30" WIDTH	36" WIDTH	42" WIDTH
QT230WW	QT236WW	QT242WW
QT230AA	QT236AA	QT242AA
QT230BC	QT236BC	QT242BC
QT230BL	QT236BL	QT242BL
QT230SS	QT236SS	QT242SS
	QT230WW QT230AA QT230BC QT230BL	QT230WW QT236WW QT230AA QT236AA QT230BC QT236BC QT230BL QT236BL

TYPICAL SPECIFICATION


The Range Hood shall be a Broan QT20000 Series. It will be 30", (36"), (42") wide and have a White, (Almond), (Biscuit), (Black), (Stainless Steel) finish.

The hood must be convertible between 3¼" x 10", 7" round, and non-ducted discharges. It will use a washable aluminum grease filter (ducted discharge) as well as a non-ducted, particle and odor filter (non-ducted discharge).

The motor assembly shall have a thermally-protected, plugin motor, and a one-piece polymeric fan blade. Fan speed to be controlled by an infinite rotary speed control.

Cooktop lighting to be provided by two (2) 40W, A-15 type appliance bulbs. Bulbs will be operated using a rotary control with night-light feature.

Hood to be UL listed and CSA certified.

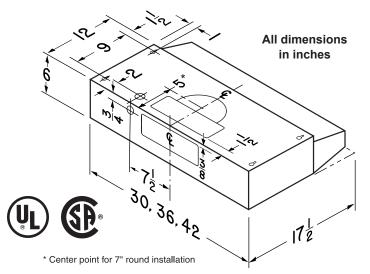



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

Broan-NuTone LLC, 926 West State Street, Hartford, WI 53027 (1-800-637-1453)

REFERENCE	EFERENCE QTY. REMARKS		Project		
			Location		
			Architect		
			Engineer		
			Contractor		
			Submitted by	Date	