


# EUROPA™ SERIES CEILING FANS

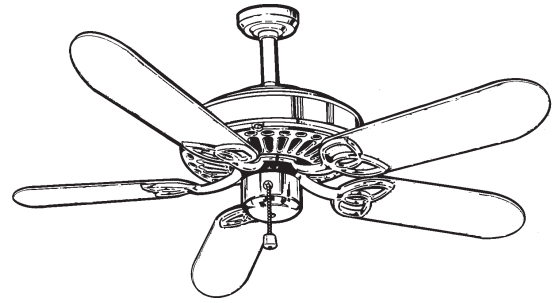

**Keep your home more comfortable all year long.**

**FEATURES**

- Available in 52" and 42" diameters
- Available in Antique Brass (AB), Polished Brass (PB), White with brass accents (WB), and White (WW)
- 5 blades — dual finish:
  - Oak/Walnut with Models P502AB, P502PB, P402AB, and P402PB
  - White/Bleached White with models P502WB, P402WW, and P402WB
  - White on both sides with model P502WW
- Laminated, seasoned blades, sealed to resist warping
- Dual mount — both 4" downrod and close to ceiling mount included
- Die cast mounting bracket for a strong, safe and durable installation
- 3 speed, reversible 153 x 15 motor (52" ceiling fans), 153 x 10 motor (42" ceiling fans)
- 11.5° blade pitch
- Blade bracket pads premounted to motor for quick, easy installation
- Quiet, triple capacitor control of speeds
- 52" wire leads for use with optional extension downrods

**TYPICAL SPECIFICATION**

Unit shall be Broan Model P502AB (P502PB), (P502WW), (P502WB), (P402AB), (P402PB), (P402WW), (P402WB).

Blades shall be laminated plywood construction.

Both a 4" downrod and close to ceiling mount shall be included.


Unit shall have triple capacitor.

Wire lead lengths to be 52" long.


Blade bracket isolators to be premounted to motor.

**SPECIFICATIONS**

Series	Volts	Amps	Speed	RPM	a	b	c	d
P502 52"	120	.7	High	180	10-3/4"	11-7/8"	7-1/2"	8-5/8"
			Medium	115				
			Low	70				
P402 42"	120	.4	High	195	10-3/4"	11-7/8"	6-5/8"	7-3/4"
			Medium	145				
			Low	80				

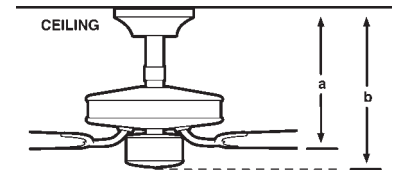

**Standard Downrod Mount**



**Close to Ceiling Mount**

Broan-NuTone LLC, A Nortek Company, Hartford, Wisconsin 53027

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date